


직관형 LED램프




Items	1,198mm, 22W		580mm, 12W	
	ELT22CDD	ELT22CWD	ELT12CDD	ELT12CWD
Power	22W		12W	
Input	DC 570mA, 40V		DC 350mA, 34V	
Type	Diffuser Cover			
Flux	2,400 lm	2,200 lm	1,250 lm	1,170 lm
Efficiency	110 lm/W	100 lm/W	105 lm/W	99 lm/W
Color Rendering	80 Ra	80 Ra	80 Ra	80 Ra
Illuminance @1m	750 lux	700 lux	360 lux	350 lux
Lifetime	50,000 hr			
Color Temp.	Cool White(5,700 K)	Warm White(3,000 K)	Cool White(5,700 K)	Warm White(3,000 K)
Direction Angle	150°			
Base Type	G13			
Dimension	1,198mm(4ft.) / Ø25.6mm		580mm/590mm(2ft.) / Ø25.6mm	
Weight	360g		175g	
Temp. Range	Operating : -10°~ 40°C			

CONNECTION DIAGRAM

AC-DC Converter type

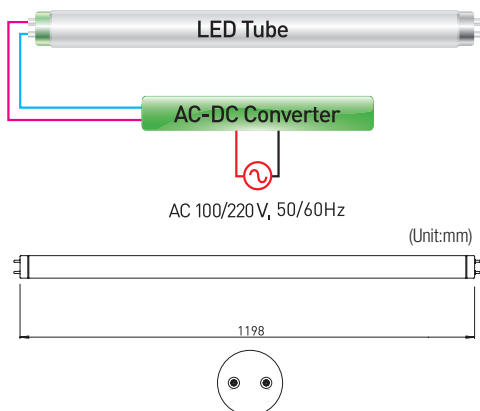

거리별조도

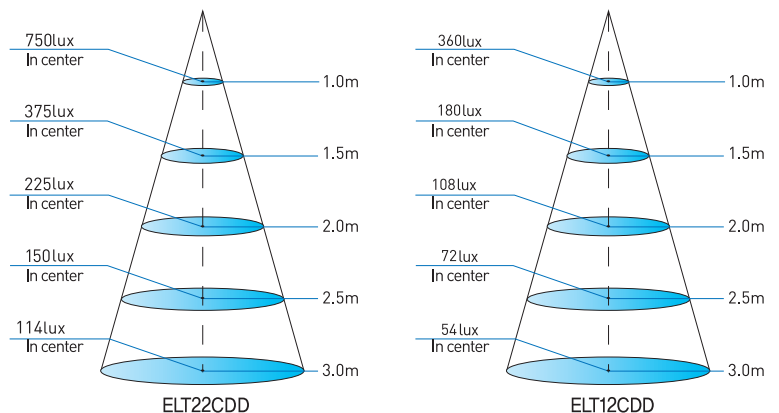



Items	900mm, 14W	1,500mm, 25W	1,800mm, 30W	2,400mm, 40W
	ELT14CDD/ELT14CWD	ELT25CDD/ELT25CWD	ELT30CDD/ELT30CWD	ELT40CDD/ELT40CDD
Power	14W	25W	30W	40W
Input	DC 24V	DC 24V	DC 24V	DC 24V
Type	Diffuser Cover			
Flux	1,260 lm	2,250 lm	2,610 lm	3,510 lm
Efficiency	90 lm/W	90 lm/W	90 lm/W	90 lm/W
Color Rendering	80 Ra	80 Ra	80 Ra	80 Ra
Lifetime	50,000 hr			
Color Temp.	Cool White(5,700 K) / Warm White(3,000 K)			
Direction Angle	150°			
Base Type	G13/R17d			
Dimension	894mm(3ft.) / Ø25.6mm	1,499mm(5ft.) / Ø25.6mm	1,763mm(6ft.) / Ø25.6mm	2,367mm(8ft.) / Ø25.6mm
Weight	262g	445g	519g	693g
Temp. Range	Operating : -10° ~ 40°C			



전북 ○○군청



인천 ○○주민센터